


ENVIROGRAF® PRODUCT GROUP 2

INTUMESCENT FIRE-STOP BLOCKS

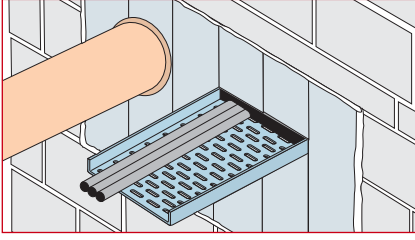

DESCRIPTION

A non-inflammable, compressible, foil-clad mineral fibre block with intumescent properties, 1200mm long. Designed to form a fire and smoke barrier and easily cut to size with a sharp knife. The blocks have self-adhesive tape for joining together. Available in the standard sizes shown below. Other sizes can be made to order.

USE

For use in walls or floors, and can be easily removed for the maintenance of services. Ideal as a fire break under suspended computer floors, or between screen walling and concrete floors. They can be used with Envirograf® wraps and pipe collars for PVC/copper/steel pipes.

PERFORMANCE

Tested to BS476 Part 22 (1987), achieving an integrity of 138 minutes. Also tested at VNE to European Standard EN1363-1 (2000).

ORDERING REFERENCES :

Ref	Depth x Width	Ref	Depth x Width
IB1	50mm x 150mm	IB2	100mm x 150mm
IB1A	50mm x 100mm	IB2A	100mm x 100mm
IB1B	50mm x 50mm	IB2B	100mm x 50mm

NB: IB1=1hr IB2=2hr rating. Other sizes can be made to order

PATENTED