


ENVIROGRAF® PRODUCT GROUP 5

INTUMESCENT-COATED NON-FIBROUS SLABS

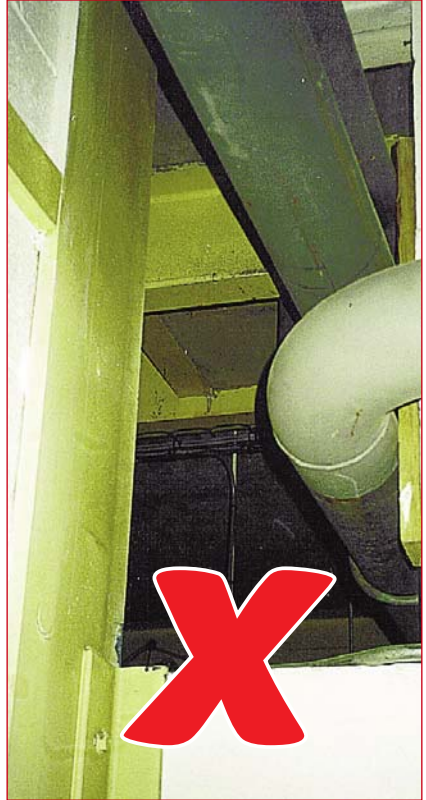

DESCRIPTION

A high density fire-stop sponge with either white intumescent coating on both sides or black impregnated sponge that is easily cut with a sharp knife and can be painted over/decorated. An appropriate quantity of Envirograf® Jointing Compound is supplied.

USE

Suitable for use as a permanent fire barrier, where no fibres are permitted (eg: including computer rooms, operating theatres, sterile areas, electronics areas, and food preparation areas. Where services pass through the slab, use Envirograf® Products 1, 7, 13, and 110.

PERFORMANCE

Tested to BS476 Part 22 (1987), achieving integrity of 138 minutes. Also tested at VNE to European Standard EN1363-1 (2000).

ORDERING REFERENCES :

Ref	Dimensions (mm)
WHITE COATING	
NF50/ 500	50 x 500 x 1000
NF50/ 750	50 x 750 x 1000
NF50/1000	50 x 1000 x 1000
BLACK IMPREGNATED	
BNF50/ 500	50 x 500 x 1000
BNF50/ 750	50 x 750 x 1000
BNF50/1000	50 x 1000 x 1000

PATENTED

