


ENVIROGRAF® PRODUCT 36

INTUMESCENT BLOCK GRILLES

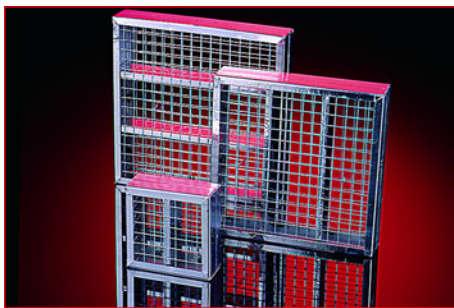

DESCRIPTION

A non-clogging block-type intumescent grille 38mm deep, giving 90% free ventilation area. The openings would be sealed off in **under one minute** when attacked by fire.

USE

These grilles are used in ceilings, doors, walls, and ventilation ducting.

PERFORMANCE

This product underwent a fire resistance test employing the general procedures and criteria of: BS476 Part 22 (1987), achieving an integrity of 240 minutes. Also tested at VNE to European Standard EN1363-1 (2000).

ORDERING REFERENCES :

BG (see price list for full range. Special sizes made to order)

