


ENVIROGRAF® PRODUCT 79

GLAZING BEAD SYSTEM FOR FIRE DOORS AND SCREENS

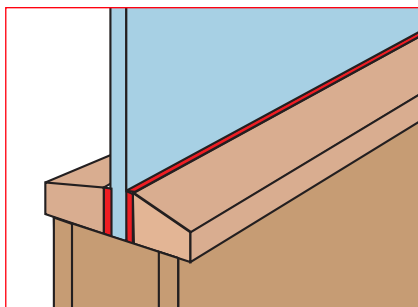

DESCRIPTION

A complete glazing system consisting of 2100mm long wooden beads (with bolection moulding if required) treated with Envirograf® clear intumescent coating. Circular glazing beads are also available. Standard finishes include sapele and pine (others available to order)

USE

Ideal for doors and screens. The beads can be painted or varnished, and they are supplied with appropriately-sized fixing pins or screws for fixing at 200mm intervals along the length.

PERFORMANCE

This product was used in a number of fire resistance tests employing the general procedures and criteria of BS476 Part 22 (1987), achieving an integrity of over 45 minutes (10mm thick hardwood and 15mm thick softwood) and over 68 minutes (25mm hardwood).

ORDERING REFERENCES:



Straight	Bead Size	To Suit	Wood Type	Protection
30/G10	10mm	44mm doors	hard	30 minutes
30/G15	15mm	44mm doors	soft	30 minutes
60/G25/44	25mm	44mm doors	hard	60 minutes
60/G25/54	25mm	54mm doors	hard	60 minutes
Circular				
C4/30/G10	10mm	400mm diam	hard	30 minutes
C5/30/G10	10mm	500mm diam	hard	30 minutes
C4/60/G25	25mm	400mm diam	hard	60 minutes
C5/60/G25	25mm	500mm diam	hard	60 minutes

Add suffix /L if bolection moulding (lip) is required