


ENVIROGRAF® PRODUCT 102

INTUMESCENT MATERIAL TO FIT UNDER DOOR EDGING

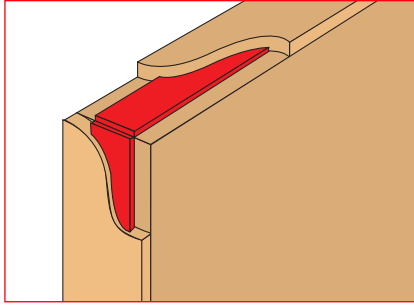

DESCRIPTION

Envirograf® self-adhesive intumescent material 2mm thick to be fitted under hardwood door edging as a fire protection seal. The material is protected from damage by the hardwood door edging and expands in a fire to seal the gaps between door and frame in a fire.

USE

The strip is fitted to the underside of the hardwood lip on the edges of the door.

PERFORMANCE

This product was included in a fire test conducted to the general procedures and criteria of BS476 Part 22 (1987), achieving an integrity of up to 60 minutes.

ORDERING REFERENCES :

ES/UL/25	To suit doors 25 mm thick	30 minutes protection
ES/UL/30	To suit doors 44 mm thick	30 or 60 minutes protection
ES/UL/34	To suit doors 50 mm thick	60 minutes protection

