
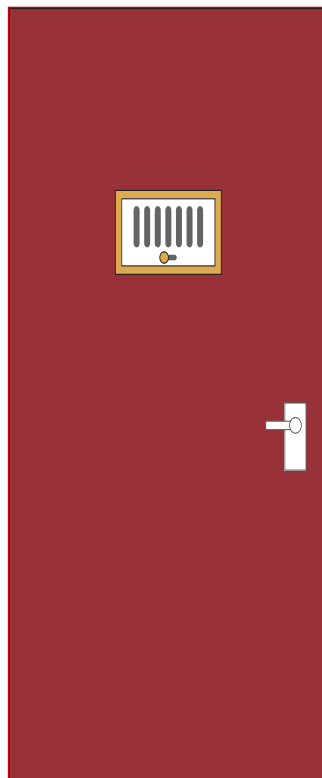
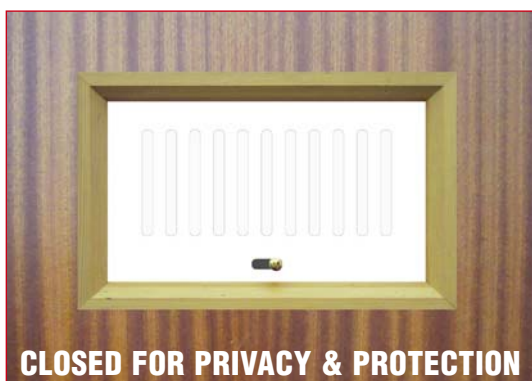


# ENVIROGRAF® PRODUCT GROUP 130

## FIRE-PROTECTED SECURITY DOOR VIEWER FOR USE IN EXTERIOR OR INTERIOR DOORS

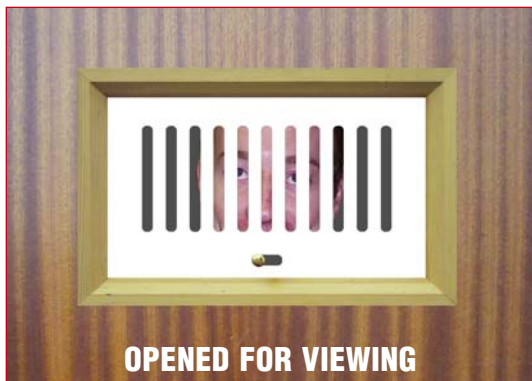

### DESCRIPTION

The Envirograf® personal door viewer has integral fire resistance and a cutout size of only 229mm high and 368mm wide. It comprises an internal sliding shutter plate with observation slots that can be moved sideways to align with observation slots on the external frame. The door viewer is made from strong zintec sheet metal (20 SWG or 0.92mm thick) finished in black, bronze, brown, or white powder coating (other colours are available to order). The unique glass plate allows for discreet observation and is supplied with 6mm thick armoured glass. The armoured glass is unbreakable and gives extra security to domestic apartments and houses, detention rooms in police stations, mental institutes, prisons, etc. Complete fire protection is offered whether the viewer shutter is in the open or closed position. Available in 30 or 60 minute ratings.

### USE

The viewer offers a greater panoramic view than is available through spy hole viewers, and it has the advantage of being able to be kept in the open position without compromising the integrity of the door in a fire. It is ideal for monitoring patients in hospitals, viewing occupants in conference rooms, meeting rooms, prisons, banks and other financial institutions, domestic residences, etc.

### PERFORMANCE

Tested to BS476 Part 22 (1987) for 66 minutes.

### ORDERING REFERENCES :

**DV30 DV + Beading set for 44mm doors - 30min fire rating - softwood**  
**DV60 DV + Beading set for 54mm doors - 60min fire rating - hardwood**  
**Other viewers can be made to order to suit doors of other thicknesses**  
**The product can be fitted with a locking device – state if required**

PATENTED